


### FEATURES

- Fully approved to EN54 part 2 & 4
- Attractive, modern design
- Installer friendly
- One man walk test
- Two monitored sounder circuits
- Class change input
- Single 12V dc battery requirement for 24-hour standby
- Auxiliary 24V DC output

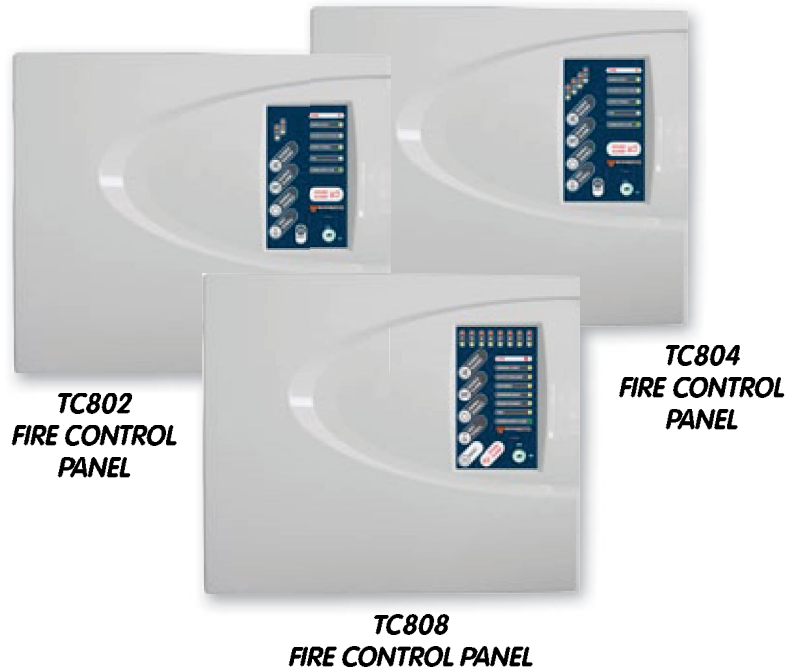

### DESCRIPTION

The TC800 range of conventional fire panels is available in 2, 4 and 8 zones. Aesthetically pleasing with a removable door for easy installation, the control panels provide an excellent value for money proposition for a small, basic conventional fire system.

### SPECIFICATIONS

#### Electrical

Main Power supply 230V AC  $\pm 10\%$ , 0.315A fuse

Standby Power supply 1 x 12V / 7Ah, 2A fuse

	TC802/4	TC808
Sounder Circuit 1	24V / 0.3A, 0.3A fuse (PTC)	24V / 0.5A, 0.5A fuse (PTC)
Sounder Circuit 2	24V / 0.3A, 0.3A fuse (PTC)	24V / 0.5A, 0.5A fuse (PTC)
Fault Relay, volt free changeover contacts	3A @ 120V AC, 3A @ 60V DC	
Fire Relay, volt free changeover contacts	3A @ 120V AC, 3A @ 60V DC	
Auxiliary output	24V DC, 0.3A fuse (PTC)	

#### Environment

Working temperature -5 to 40°C

Storage temperature -20 to 60°C

Humidity 0 to 95%

#### Mechanical

Size (HxWxD) 270mm x 320mm x 90mm

Weight (excl. batteries) 2.4kg